

ALFRESCO

LX2 to Cart, Assembly Instructions



When assembling a barbeque on to a cart, great care should be exercised to avoid bodily injury. Though, at the factory, every effort is made to remove all burrs and sharp edges from the sheet metal parts, there still remains the possibility of injury. Sheet metal, because it is relatively thin, can cause serious injury, especially when pinching or trapping occurs. Additionally, there is risk of injury when lifting. Under no circumstances should you attempt to single handedly install the barbeque on the cart, not even with the smallest barbeque (30"). Placing the barbeque on the cart requires that the unit be lifted over the cart, then lowered into position; this is a two person job, where each person must be capable of safely handling the weight involved.




NOTE: ALL REFERENCES, IN THESE INSTRUCTIONS, TO LEFT SIDE OR RIGHT SIDE, ARE WHEN VIEWED FROM THE FRONT OF THE CART/BARBEQUE.

NOTE: THE FOLLOWING PROCEDURE APPLIES TO ALL THREE SIZES OF ALFRESCO BARBEQUES / CARTS.

Step 1.

Before proceeding, look at the following pictures to see what the results should look like. Then, with the casters already installed on the cart, lock the two lockable casters to prevent the cart from moving. Carefully lift the barbeque (one person at each end) over the cart and lower the barbeque on to the cart. The cart will fit inside the lower part of the barbeque. Take care when doing this to avoid damaging any of the components of the barbeque. When the barbeque is in place on the cart, look at the following pictures again to check if your installation matches. Note, no fasteners are needed for this step.

TIP: The weight of the barbeque can be substantially reduced by temporarily removing loose components, such as the grates, briquette trays and the drip pan.

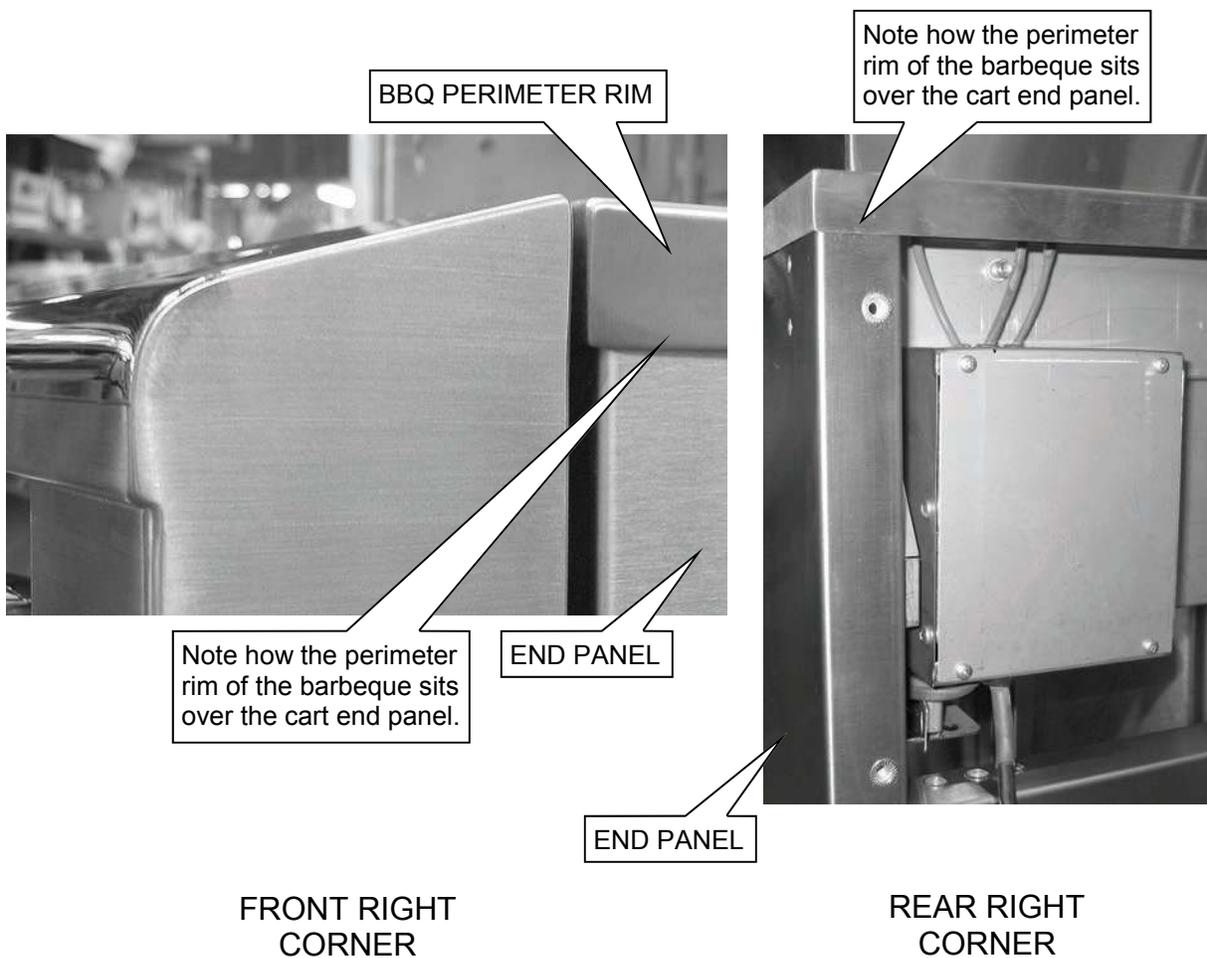

THE FOLLOWING PROCEDURE SECURES THE REAR OF THE BARBEQUE TO THE CART.

Step 2.

NOTE: TO ORDER THE PARTS NEEDED FOR STEPS 2 & 3, ORDER MOUNTING KIT, PART NO. 190-0032. EACH KIT CONTAINS THE PARTS NEEDED TO MOUNT ONE BBQ (FRONT & REAR) TO A CART.



130-1631



200-0089



200-0242





200-0087



200-0074



200-0090

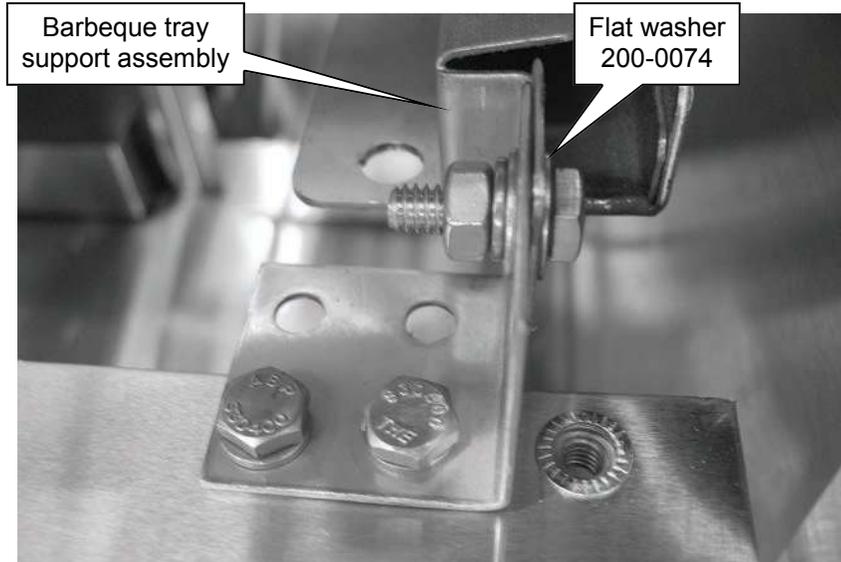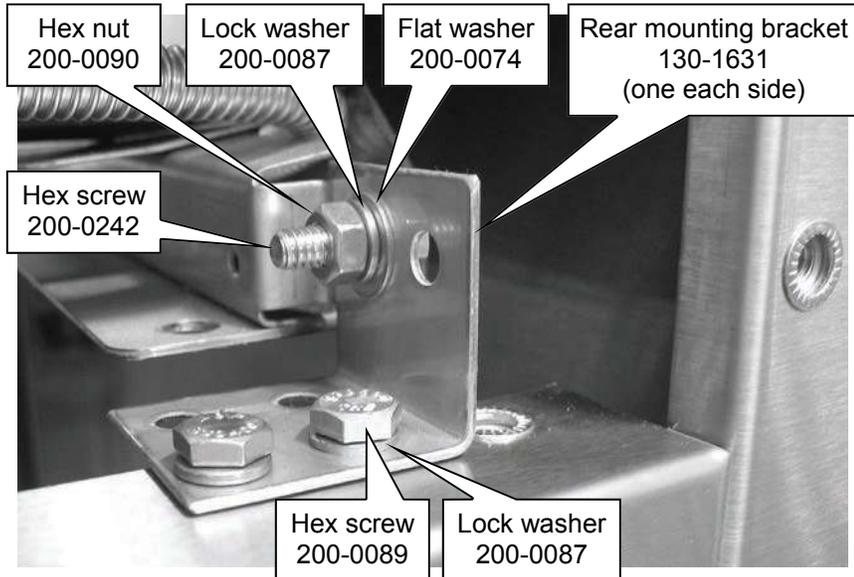

Note: The above two views show the rear left side of the barbecue being secured to the cart. To secure the rear right of the barbecue to the cart, the second mounting bracket (130-1631) must be attached in the same manner but with the bracket rotated 180°, thereby using the three holes not used when securing the rear left.

THE FOLLOWING PROCEDURE SECURES THE FRONT OF THE BARBEQUE TO THE CART.

Step 3.

NOTE: TO ORDER THE PARTS NEEDED FOR STEPS 2 & 3, ORDER MOUNTING KIT, PART NO. 190-0032. EACH KIT CONTAINS THE PARTS NEEDED TO MOUNT ONE BBQ (FRONT & REAR) TO A CART.

LIFT OFF AND CAREFULLY STORE THE CART DOORS BEFORE PROCEEDING WITH THIS STEP. REPLACE THE DOORS WHEN STEP 3 IS COMPLETED.



510-0170





200-0089



200-0087



200-0074

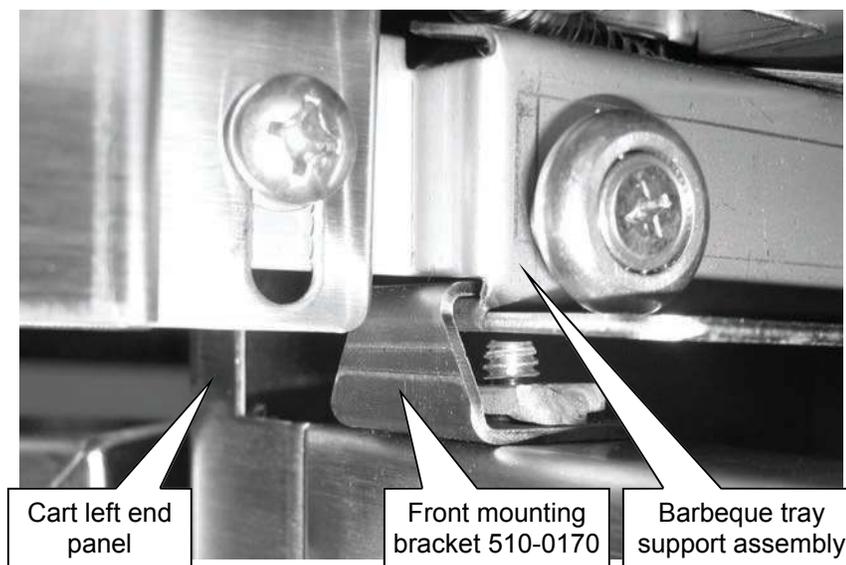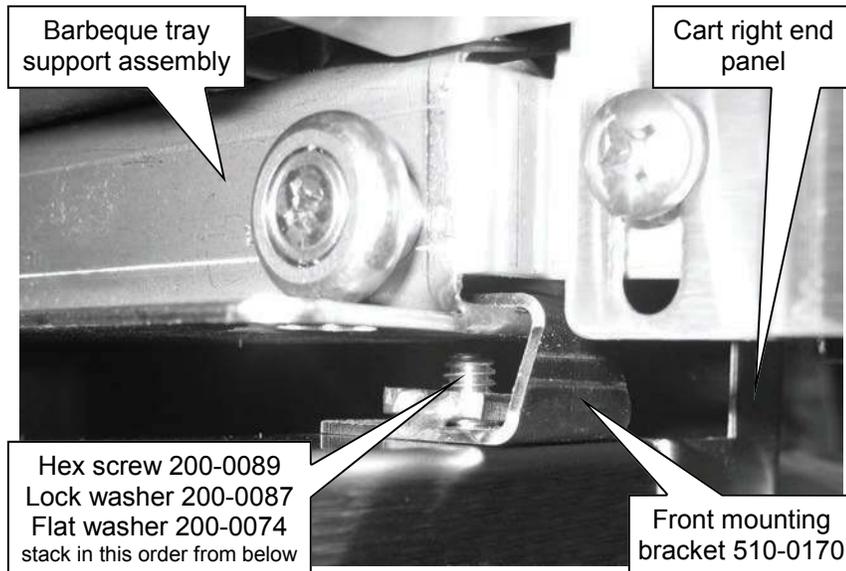

THE FOLLOWING PROCEDURE COMPLETES THE INSTALLATION OF THE BARBEQUE TO THE CART.

Step 4.

Slide the top rear panel up under the rim of the barbecue and secure it to the cart with four screws (200-0086)


Top rear panel:
130-1627 (ALX2 30" - shown)
130-1633 (ALX2 42")
130-1814 (ALX2 56" & 56" BFG
(See page 6 for illustrations)



200-0086

Power cord strain relief
210-0269

This end through
top rear panel

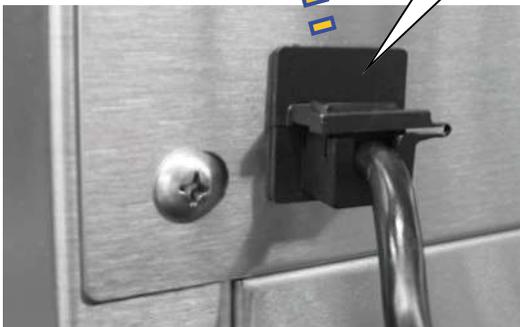

210-0269

Power cord
goes here



Recommended type of tool for
compressing and inserting the
strain relief.

To install the strain relief on the power cord, fold the strain relief around the cord, as shown, then press the two sides together until you feel a click as the two sides lock together around the power cord. Next, insert the strain relief into the square hole and push in until the strain relief snaps into place and is locked into the top rear panel.


Cart top rear panels



ALX2 30" TOP REAR PANEL 130-1627



ALX2 42" TOP REAR PANEL 130-1633

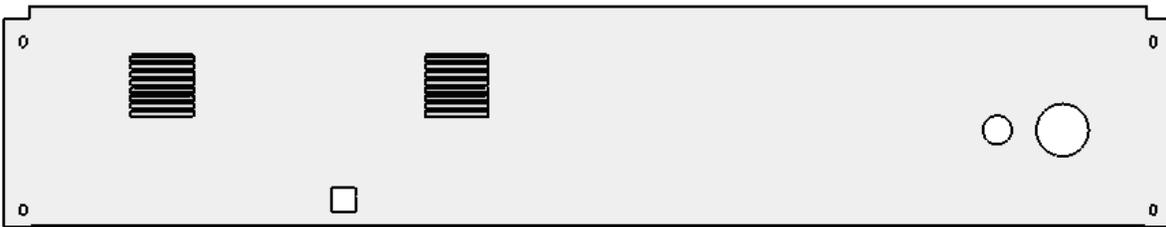


ALX2 56" & ALX2 BFG TOP REAR PANEL 130-1814




REAR VIEW OF BBQ MOUNTED ON CART WITH REAR COVER INSTALLED.
CONTINUE TO PAGES 8, 9 & 10 TO INSTALL SIDE SHELVES.

THE FOLLOWING PROCEDURE SECURES THE SIDE SHELF MOUNTING BRACKETS TO THE CART.


NOTE: TO ORDER THE PARTS SHOWN ON THIS PAGE, ORDER BBQ CART SIDE BRACKET KIT, PART NO. 190-0030. EACH KIT HAS PARTS TO MOUNT ONE SHELF

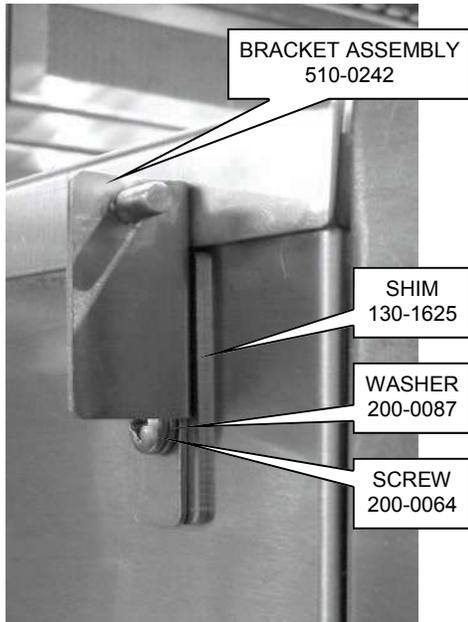


FRONT LEFT END SHELF BRACKET & SHIM

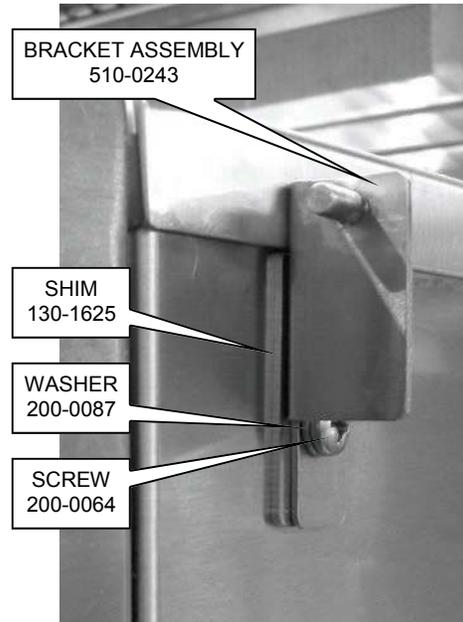

FRONT RIGHT END SHELF BRACKET & SHIM

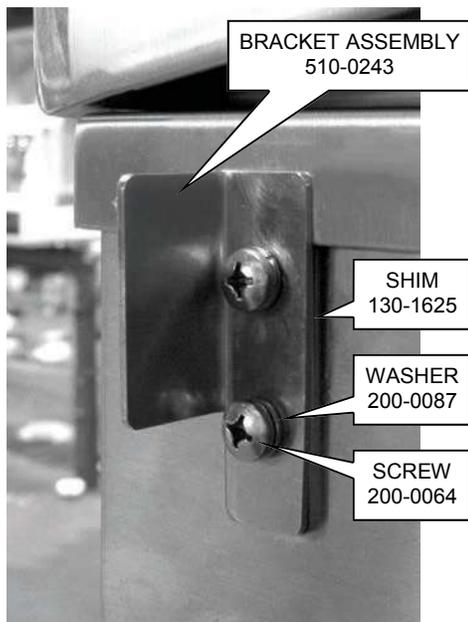

REAR LEFT END SHELF BRACKET & SHIM

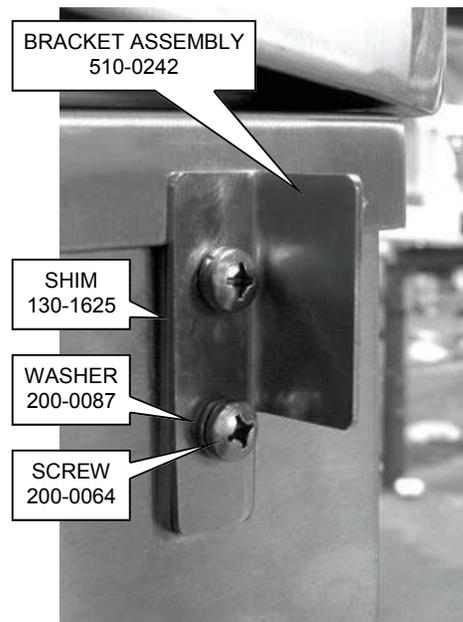


REAR RIGHT END SHELF BRACKET & SHIM

INSTALLATION OF THE HINGED/COLLAPSIBLE SIDE SHELVES.



Horizontal slots allow installation of shelf over the pins on the shelf bracket assemblies

To install the shelf onto the end of the barbecue cart, hold the shelf horizontal and allowing the shelf mounting bracket pins to pass through the horizontal slots in the shelf, as shown above, position the shelf against the end of the cart then push down to engage the pins into the inner (angled) slot.

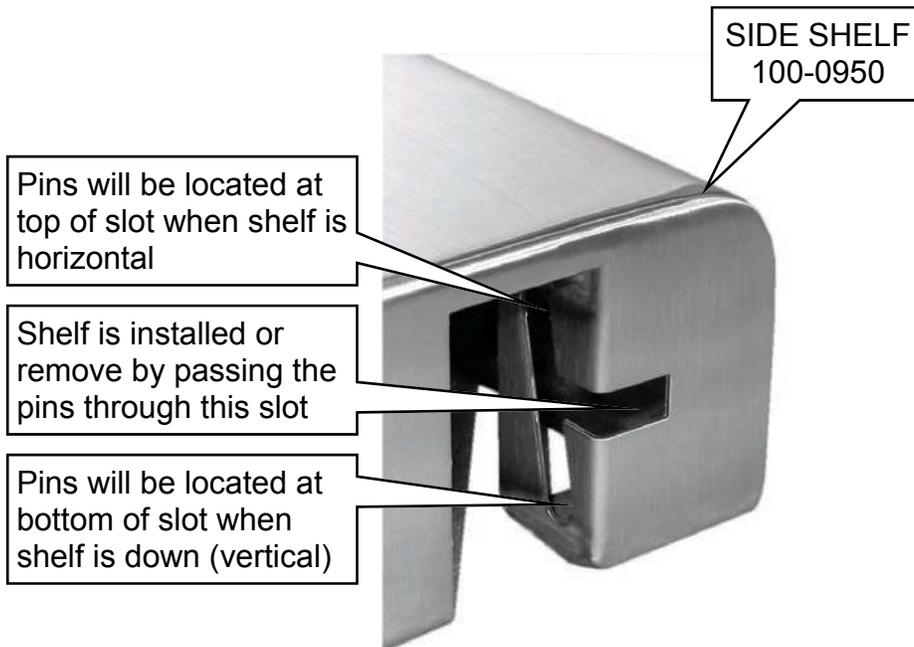



VIEW LOOKING UNDER THE SHELF TOWARDS THE REAR OF THE CART (LEFT END)



VIEW LOOKING UNDER THE SHELF TOWARDS THE FRONT OF THE CART (LEFT END)

THE ABOVE TWO VIEWS SHOW THE UNDERSIDE OF THE SHELF WITH IT SET IN THE HORIZONTAL POSITION. THE SHELF IS LOCATED ON THE SHELF BRACKET PINS.



510-0242



510-0243



130-1625



200-0087



200-0064

SHELF MOUNTING BRACKETS, SHIM AND MOUNTING HARDWARE

NOTE: A KIT CONTAINING A PAIR OF BRACKETS & SHIMS PLUS THE NECESSARY HARDWARE IS AVAILABLE; PART NUMBER 190-0030.