

Alfresco™


FRONT PANEL REMOVAL AND REPLACEMENT

To remove the front panel of the ALX2 grill follow these simple steps:

STEP 1:

- Remove the knobs from the gas valves by pulling them straight out of their valve stems.
- Remove the smoker box assembly by pulling it straight out of its housing.
- Remove the grease tray assembly by sliding it out of the guide rails.

Note: Do not remove the rubber boots from the igniter, light and rotisserie switches as they are not mounted on the front panel

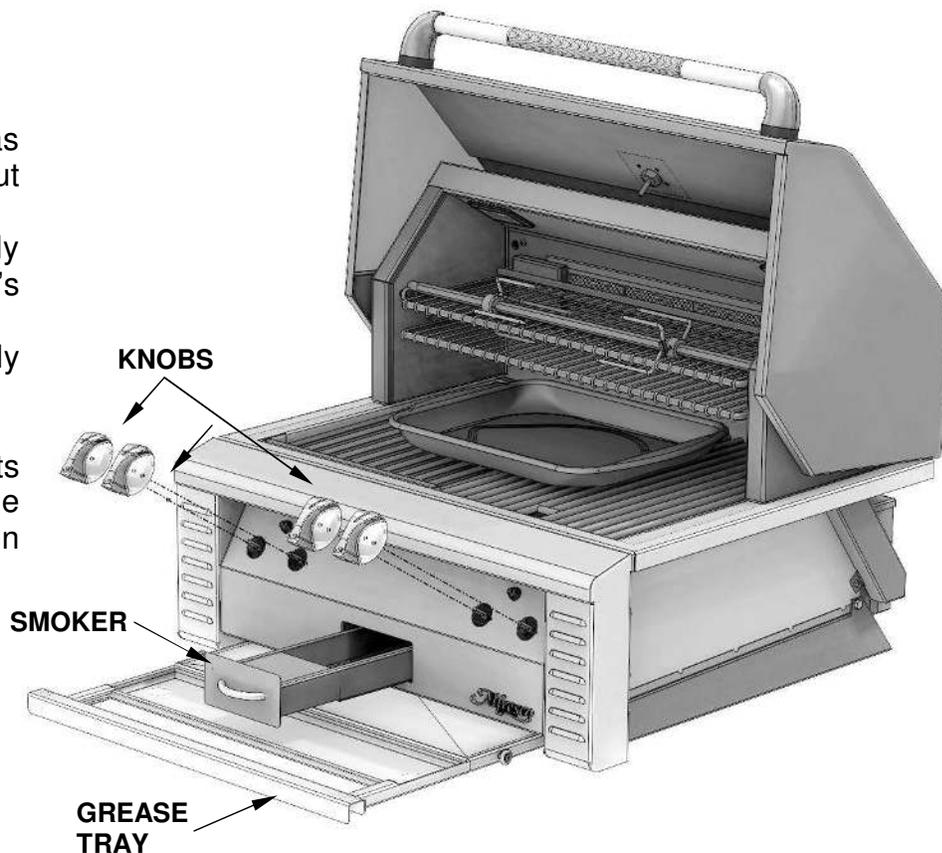

STEP 2:

- Using a # 2 Philips screwdriver take the 2 TOP SUPPORT screws located under the front panel bull nose and just above the switches.
- Using a 7/16" wrench (open, closed or adjustable wrenches work equally well) remove the 2 BOTTOM SUPPORT bolts located just behind the front panel and over the grease tray guide rails.

The front panel is now loose and can be removed by pulling it straight out of the grill's main body.

To install a new panel, reverse the steps shown above, secure and tighten all fasteners.

