

Alfresco ALSB-2C INSTALLATION GUIDE:

MAIN BODY INSTALLATION:


STEP 1:

Remove the Left or Right Side Table from the ALX2 cart.
(for the purpose of this guide the ALSB-2C will be installed on right side of the cart.)

The side table is supported by 4 Philips screws (10-32) accessible from the bottom side.

STEP 2:

Install 4 new 10-32 x 1/2" socket head screws as well as the 1 1/16"Ø grommet provided.
(see picture 1)

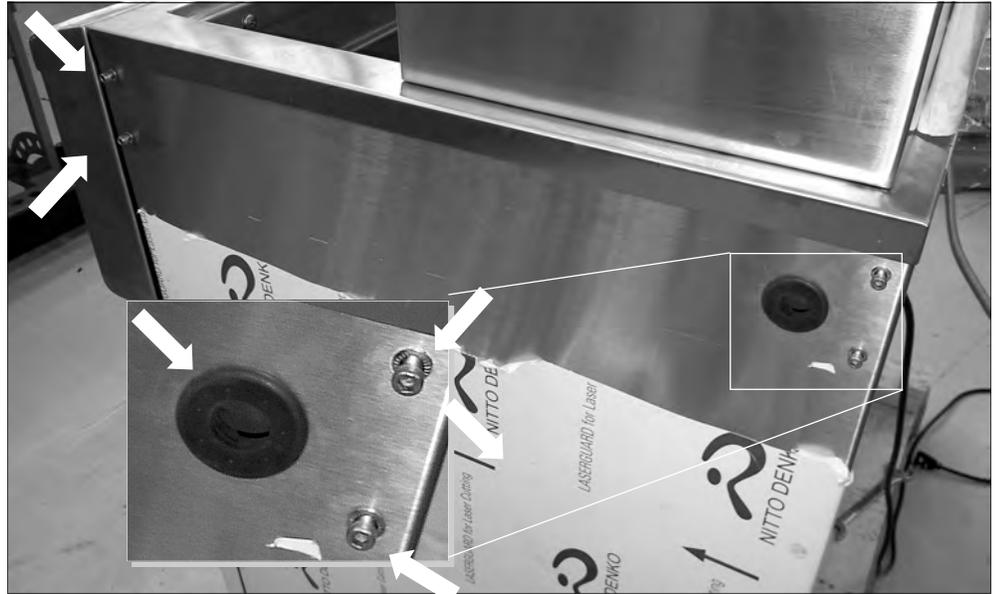

Picture 1

STEP 3:

Remove the ALSB-2C burner knobs.

Remove ALSB-2C front panel by loosening the 2 Philips screws on the inside top and 2 hex-head bolts at the bottom.
(see picture 2)

STEP 4:

Install the ALSB-2C side burner body on the cart by hooking and latching the body of the burner onto the cart's screws installed in STEP 2. (see picture 3)




Picture 2

STEP 5:

Fasten the screws that the ALSB-2 has been latched on with the 5/32" Allen Wrench provided.


Screws are accessible on the back at locations A and B (picture 3) , and locations C and D on the front. (picture 4)

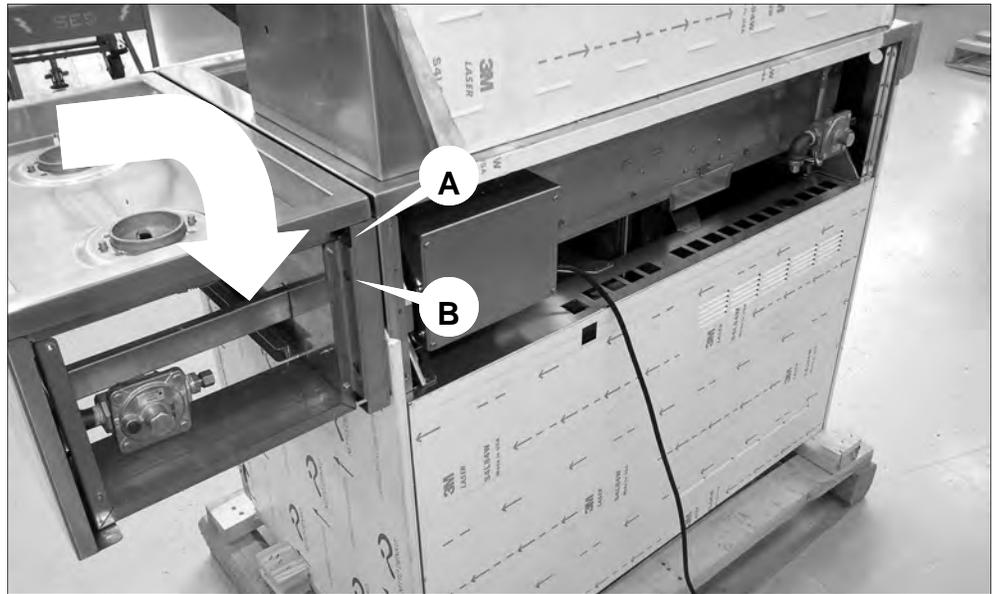

Picture 3

STEP 6:

Reinstall the ALSB-2C Front Panel and knobs to complete the mounting of the body onto the ALX2 Cart by reattaching the 2 upper screws and 2 lower bolts shown on step 3.

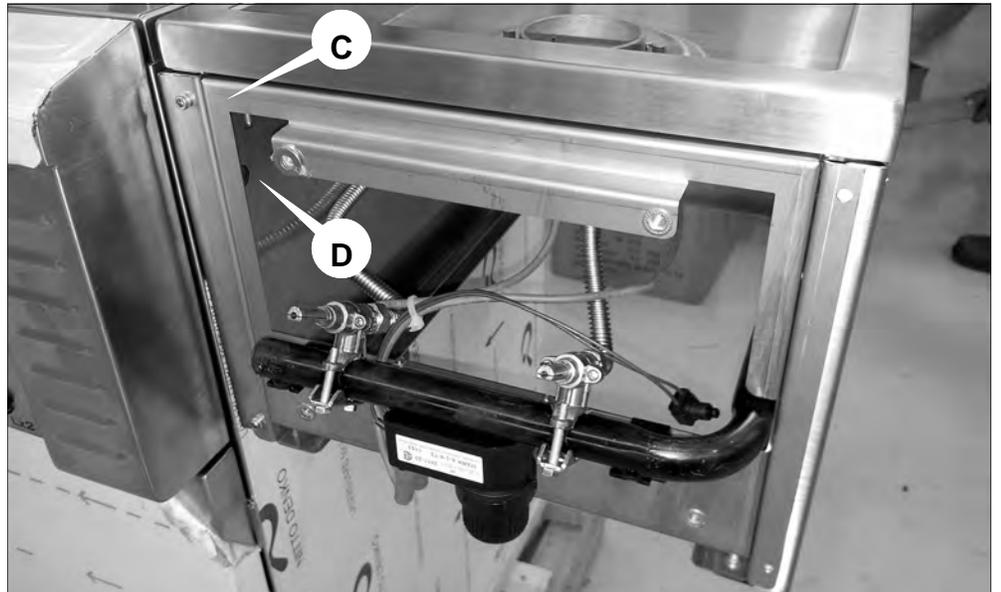


Picture 4

PIPING CONNECTIONS:

STEP 7:

Prepare the ALX2 BBQ gas connection by removing the existing 1/2" NPT elbow and 1/2" NPT x 3/8" ODF reducing nipple (on LP system only) from the BBQ's manifold pressure regulator. (see picture 5).

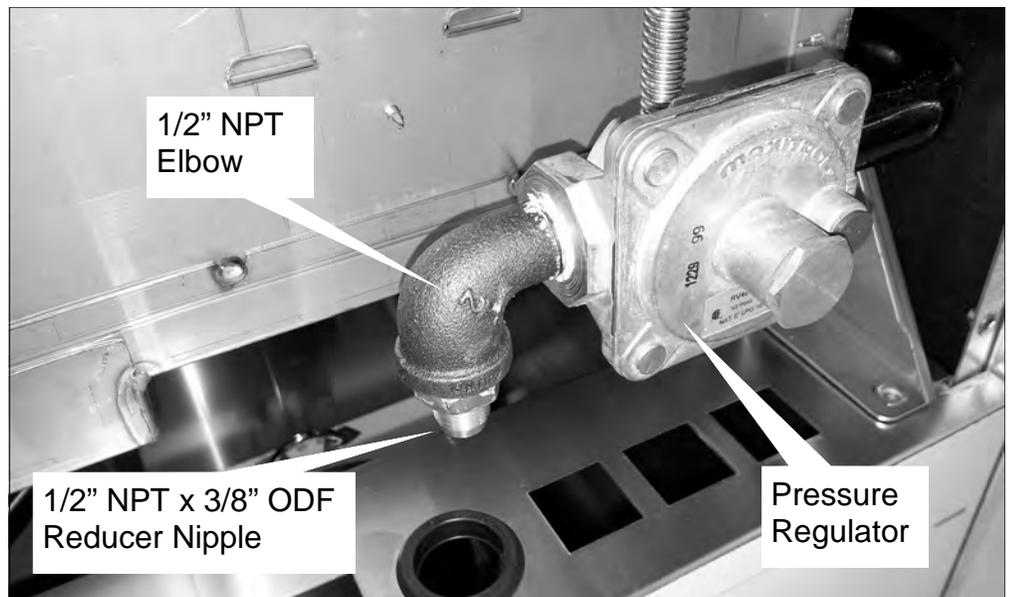

Picture 5

STEP 8:


Install the new piping assembly on the ALX2 BBQ side consisting of :

- (1) 1/2" NPT Close Nipple
- (1) 1/2" NPT Tee
- (1) 1/2" NPT x 3/8" OD Compression Fitting
- 3/8" Ø x 42" Flex hose.

For LP systems only, reinstall the existing:

- 1/2" NPT x 3/8" ODF Reducer

That was removed on STEP 7. (see picture 6)

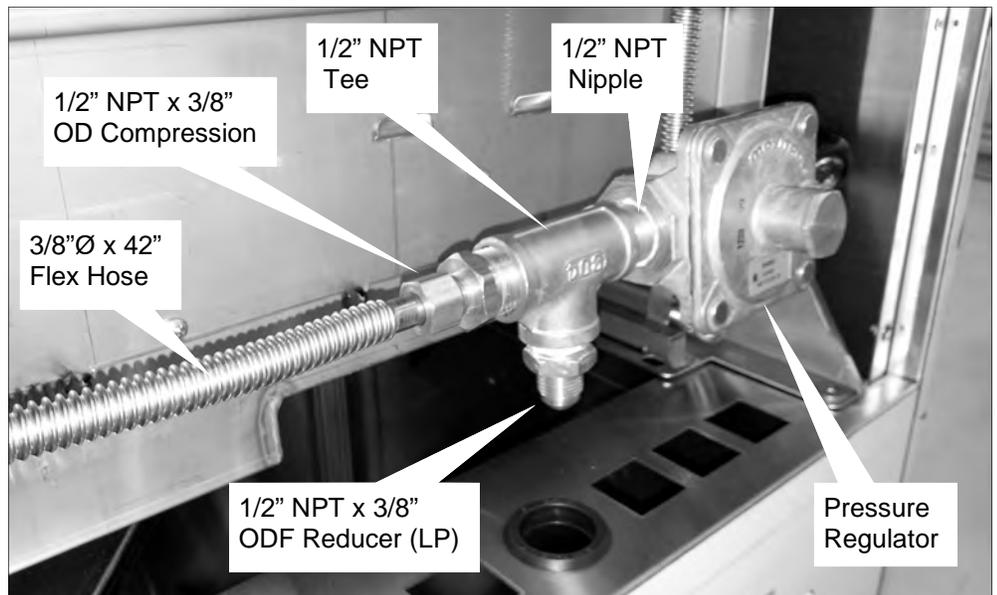

Picture 6

STEP 9:

Route the 3/8" Ø x 42" Flex Hose over the ALX2 BBQ's Rotisserie Motor Housing and insert through the 11/16" grommet installed in STEP 2.

(see picture 7)

STEP 10:


Connect the 3/8" Flex Hose to the 1/2" NPT x 3/8" OD Compression Fitting already installed in the ALSB-2C side burner unit. (see picture 8)

FINISHING:


Pressure test all fittings with soapy water to ensure that no LP or NG gas leaks are present.

Finish by closing off and re-installing all panels on the back sides of the ALSB-2C and the ALX2 BBQ unit.

Your ALSB-2C is ready for use.

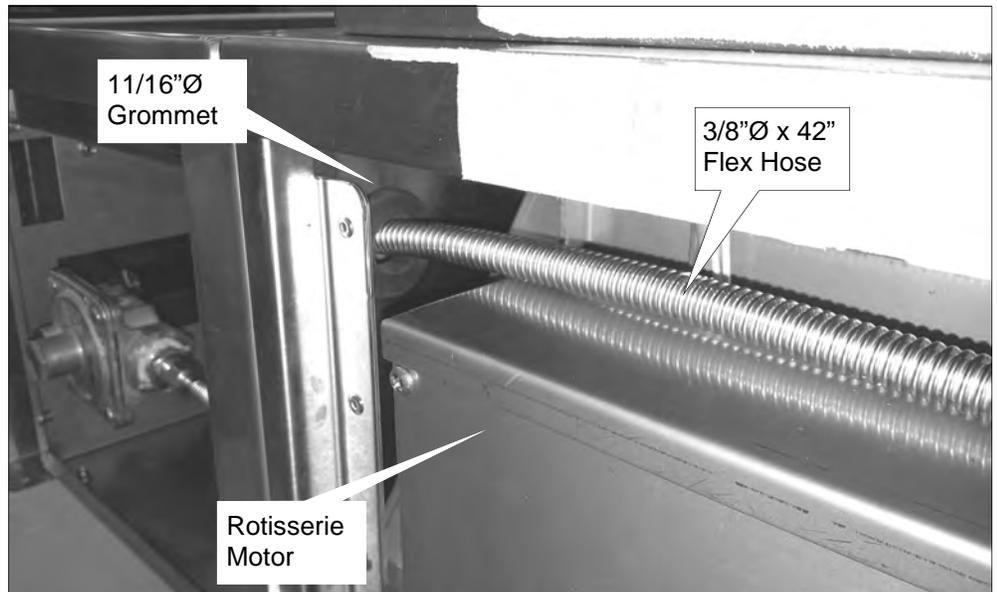

Picture 7

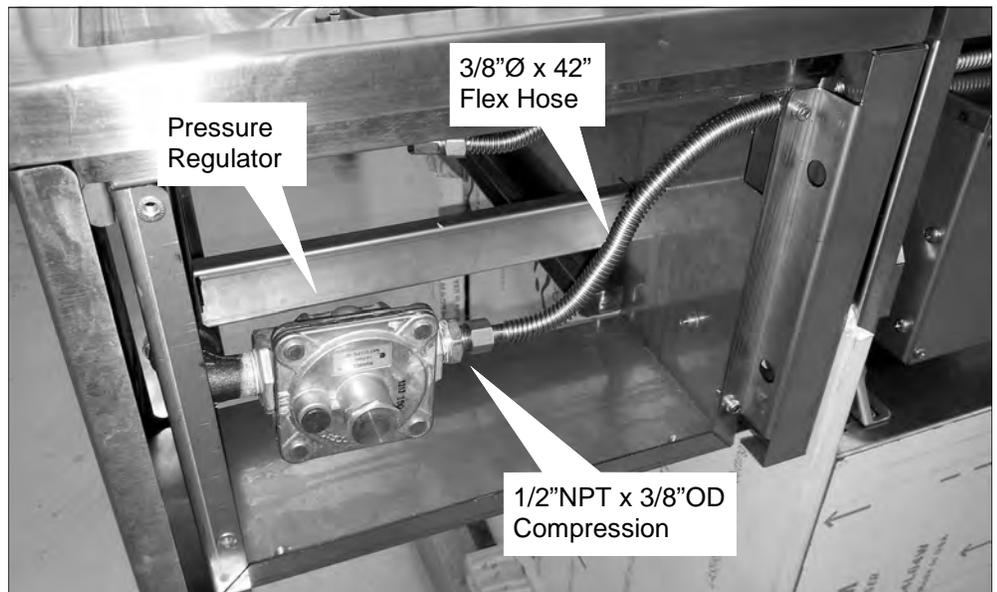

Picture 8