

ALFRESCO

LX2 to Cart, Assembly Instructions

Supplemental for serial no.s 11-00000 forward

Due to a modification of the mounting brackets, mounting of the ALX2 barbeque to a cart has changed for barbecues with serial numbers 11-00000 forward. This change effects attachment of the barbeque to the cart as is shown in the following pages. Spacers are utilized in this process, these spacers are shown below. The 1/4" long spacers are used to attach the rear of the barbeque, while the 3/8" long spacers are used at the front.

NOTE: TO ORDER THE FASTENERS & SPACERS NEEDED FOR THE PROCEDURES SHOWN ON PAGES 2 & 3, ORDER MOUNTING KIT, PART NO. 190-0036. EACH KIT CONTAINS THE PARTS NEEDED TO MOUNT ONE BBQ (FRONT & REAR) TO A CART.




1/2" x 1/4" x 1/4" long spacer



1/2" x 1/4" x 3/8" long spacer

Note: Failure to use these spacers will cause the barbeque to be inadequately secured to the cart. Over tightening of the mounting screws without the use of these spacers will damage either the barbeque, the cart or both.

THE FOLLOWING PROCEDURE SECURES THE REAR OF THE BARBEQUE TO THE CART.

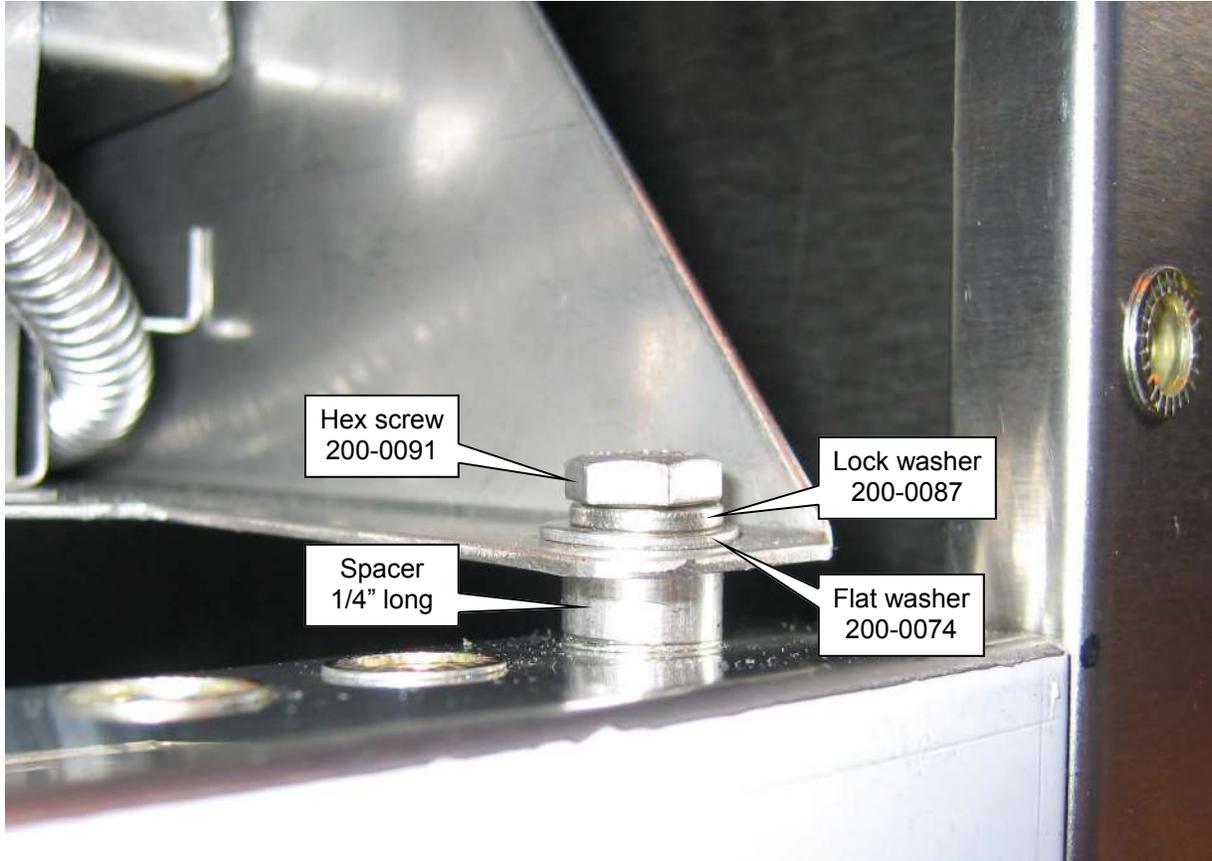

LEFT SIDE SHOWN - REPEAT FOR RIGHT SIDE.



200-0091

1/4-20 UNC SS HEX HEAD MACHINE SCREW X 1" LONG



200-0087


1/4" SS HELICAL SPRING LOCK WASHER



200-0074

1/4" SS FLAT WASHER

THE FOLLOWING PROCEDURE SECURES THE FRONT OF THE BARBEQUE TO THE CART.

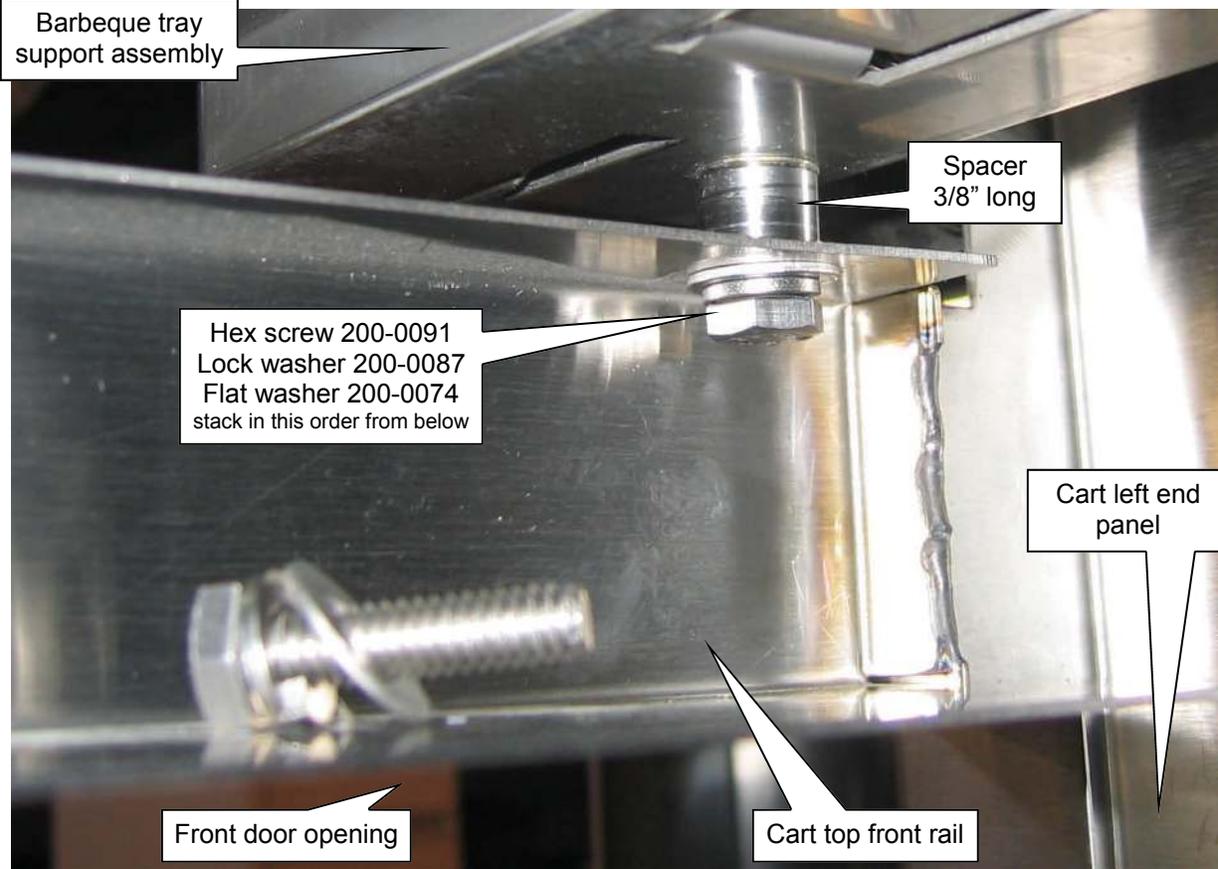

LEFT SIDE SHOWN - REPEAT FOR RIGHT SIDE.



200-0091

1/4-20 UNC SS HEX HEAD MACHINE SCREW X 11" LONG



200-0087

1/4" SS HELICAL SPRING LOCK WASHER



200-0074

1/4" SS FLAT WASHER