


COUNTERTOP OUTLET REQUIRED FOR POWER TO ROTISSERIE UNITS  
ART-ROT26, 30, 36 OR 42

POWER: 115 VAC - 0.38AMPS

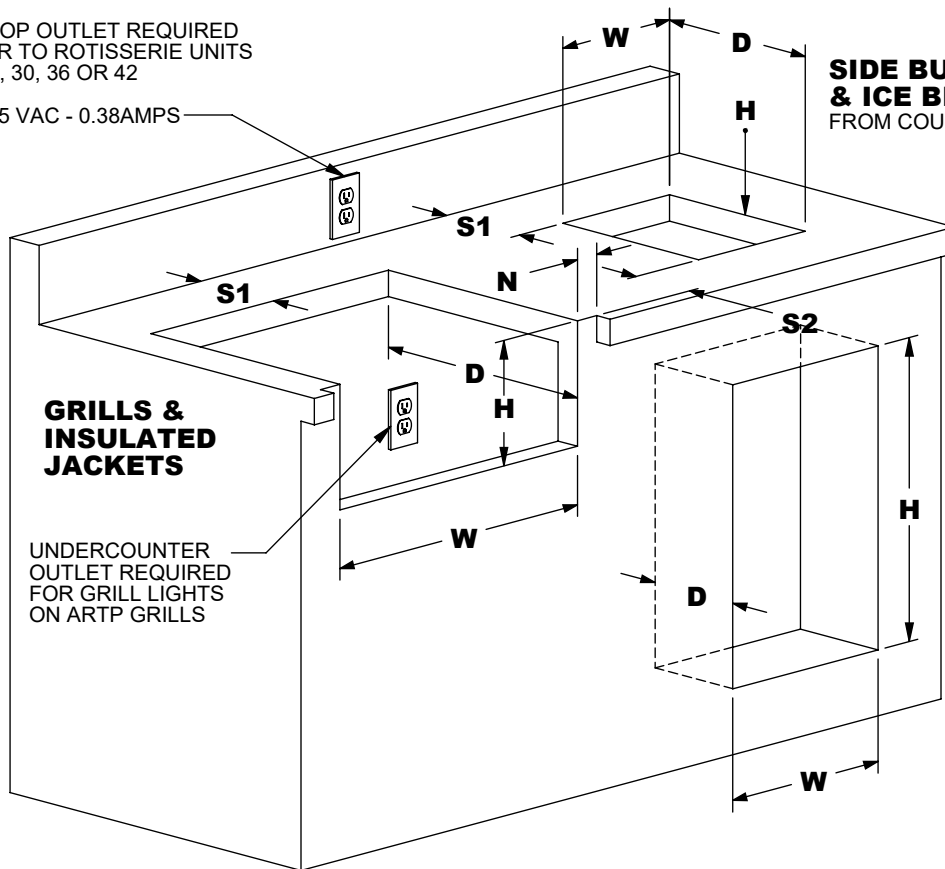

**SIDE BURNER, TRASH CHUTE & ICE BIN** ( H IS HEIGHT OF PRODUCT FROM COUNTERTOP SURFACE)

**S2** MEASUREMENT IS MEANT TO ALIGN CHUTE WITH TRASH BIN AND MEASURED FROM THE CABINET FACE.

**GRILLS & INSULATED JACKETS**

UNDERCOUNTER OUTLET REQUIRED FOR GRILL LIGHTS ON ARTP GRILLS

**DOORS, DRAWERS, TRASH CENTER & REFRIGERATOR.**

(REFRIGERATOR H DISTANCE IS MEASURED FROM FLOOR LEVEL)

SEE NOTES ON SHEET 2 OF 2

MODEL	CUTOUT DIMENSIONS			NOTCH	SETBACKS		POWER ①	GAS LINE
	W	D	H	N	S1(MIN.)	S2	AMPS	
AAEP-26	24-1/2"	19-3/4"	9-1/2"	7/8"	5-3/4"	~		③
ARTP / AAEP-32	30-1/2"	19-3/4"	9-1/2"	7/8"	5-3/4"	~	0.71 ②	③
ARTP / AAEP-36	34-1/2"	19-3/4"	9-1/2"	7/8"	5-3/4"	~	0.71 ②	③
ARTP-42	40-1/2"	19-3/4"	9-1/2"	7/8"	5-3/4"	~	0.71 ②	③
ARTIJ-26	27-1/4"	23-5/8"	10-1/4"	7/8"	1-5/8"	~		④
ARTIJ-32	33-1/4"	23-5/8"	10-1/4"	7/8"	1-5/8"	~	④	④
ARTIJ-36	37-1/4"	23-5/8"	10-1/4"	7/8"	1-5/8"	~	④	④
ARTIJ-42	43-1/4"	23-5/8"	10-1/4"	7/8"	1-5/8"	~	④	④
ART-SB1	11"	15"	~	~	1-1/2"	~		⑤
ARTP-SB2	12-3/8"	22-3/8"	9-1/4"	7/8"	4-1/4"	~		
ARTP-17DL / -17DR	13-7/8"	~	18-1/2"	~	~	~		
ARTP-26DL / -26DR	23-3/8"	~	18-1/2"	~	~	~		
ARTP-30DD	27-1/4"	~	18-1/2"	~	~	~		
ARTP-32DD	29-3/8"	~	18-1/2"	~	~	~		
ARTP-36DD	33-3/8"	~	18-1/2"	~	~	~		
ARTP-42DD	39-3/8"	~	18-1/2"	~	~	~		
ARTP-DDC-32SC	29-1/2"	19-3/4"	18-1/2"	~	~	~		
ARTP-DDC-36SC	33-1/2"	19-3/4"	18-1/2"	~	~	~		
ARTP-2DR-17SC	14-1/2"	19-3/4"	18-1/2"	~	~	~		
ARTP-3DR-17SC	14-1/2"	19-3/4"	18-1/2"	~	~	~		
ARTP-TC-15SC	12-1/2"	19"	26-1/4"	~	~	~		
ARTP-TC2-20SC	17-1/4"	24-7/8"	26-1/4"	~	~	~		
ARTP-PWC	6-1/4"	8-1/4"	3-5/8"	~	~	4-5/8"		
ARTP-TH-17	14-1/2"	8-3/4"	8-1/2"	~	~	~		
ARTP-IC	22-1/4"	16-3/4"	17-5/8"	~	~	~		
ART-BC24	24"	22-3/4"	32-3/4"	~	~	~		

**NOTES FOR CHART ON SHEET 1 OF 2:**

**NOTE ❶:** ALL POWER SUPPLIES SHOWN ARE 115 VAC - 1Ø - 60 Hz.

**NOTE ❷:** POWER REQUIREMENTS FOR ARTP-32, 36 AND 42, INCLUDE LIGHT AND ROTISSERIE POWER TOGETHER.

AAEP BBQ'S USE 9 VDC IGNITION AND DO NOT HAVE LIGHTS.

**NOTE ❸:** ALL GAS LINES REQUIREMENTS ARE AS FOLLOWS:

**NG:** 1/2" NPT WITH 5" W.C. (HARD PIPED OR FLEX CONNECTION)

**LP:** 3/8" ODF WITH 10" W.C. (FOR PORTABLE TANKS)

**LP:** 1/2" NPT WITH 10" W.C. (HARD PIPED OR FLEX CONNECTION FOR WHOLE HOUSE RESIDENTIAL LP SYSTEMS)

**NOTE ❹:** INSULATED JACKETS ARTIJ-26 / 32 / 36 AND 42, DO NOT REQUIRE POWER AND OR GAS LINES BY THEMSELVES, ONLY THE GRILLS THEY ARE MEANT TO INSULATE REQUIRE THEM.

**NOTE ❺:** ART-SB1 GAS LINE IS 3/8" OD AND IT IS CONNECTED TO THE EXISTING GRILL WITH THE SUPPLIED GAS FITTINGS.